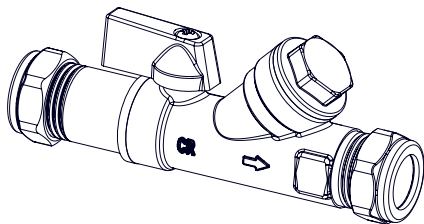


Beta**IMPORTANT NOTES**

Before installation ensure pipework is clean. PTFE tape or PTFE compound may be used on compression joints.

Always ensure the flow direction is pointing the right way to the flow of water & ensure that the Y strainer filter is facing downwards.

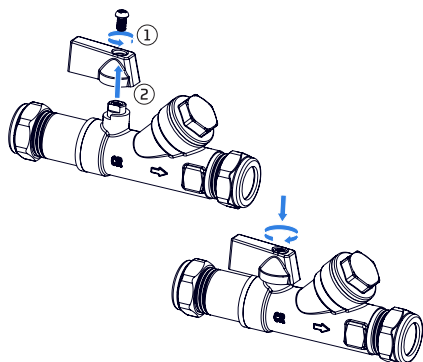

OPERATING CONDITIONS

Temperature range: 0 – 80 °C

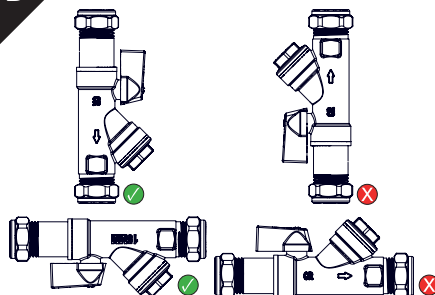
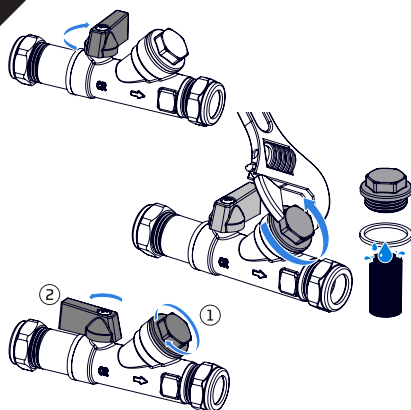
Pressure rating: PN16 (up to 16 bar)

1

TURN OFF MAIN SUPPLY OF WATER OR ISOLATE WORKING ARM.

2**Y STRAINER - 15MM**

WITH DOUBLE CHECK VALVE

3**FITTING ORIENTATION****4****MAINTENANCE****5****Final Installation Checklist**

- ~ Check connections are secure and fixed correctly
- ~ Connect & turn on water supply
- ~ Check installation for leaks
- ~ Check flow direction arrow is in the flow of water or the double check valves will not pass water through them
- ~ Check Y strainer filter position is always pointing downwards in direction of water
- ~ Visit thomasdudley.co.uk/plumbing for service & maintenance information.

©2026 TD_R379675_16376 Iss A

Thomas Dudley

295 Birmingham New Road
Dudley, West Midlands
United Kingdom
DY1 4SJ

t +44 (0)121 557 5411
f +44 (0)121 557 5345
e info@thomasdudley.co.uk
w www.thomasdudley.co.uk/plumbing

T H O M A S
D U D L E Y

