



Applications

Designed for use as a replacement in most plastic and ceramic exposed and concealed cisterns

Also supplied as standard or as an optional extra in Dudley cisterns

Complies fully with water regulations:

- ~ True AG Air Gap
- ~ No under water joints
- ~ No silence tube

Features


- ~ New simple and efficient 2-piece filter design
- ~ Unique float arm makes it impossible for the float to become detached
- ~ 3 available options of quiet fill technology:

Valve Option	Fill Nozzle		Flow Control		WRAS Approved
	Standard	Enhanced	Restricted	Regulated	
Standard	✓		✓		✓
Enhanced		✓	✓		✓
Flow Regulated		✓		✓	✓

- ~ Enhanced option offers integrated quiet fill action
- ~ Flow Regulated option includes integrated quiet fill action together with 6 litre per minute flow control for ultimate quiet fill performance.



Dimensional Data

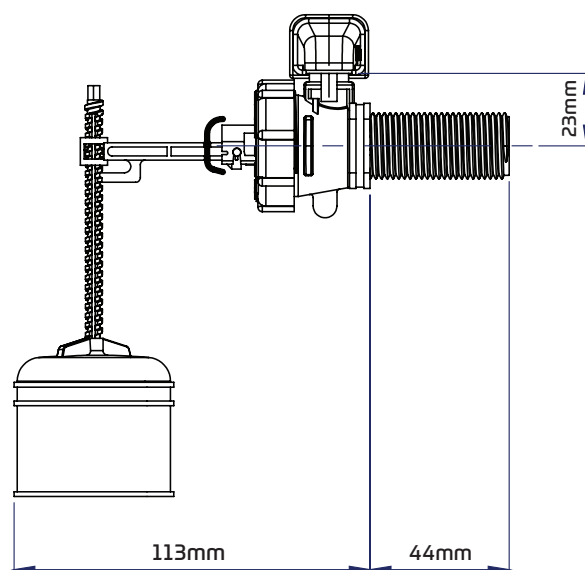

Technical Data

Connection	½" BSP plastic tail
Adjustment	65mm float height range
Valve Type	Diaphragm
Float	Standard
Conformity	BS 1212-4
Min operating pressure	0.1 bar
Max operating pressure	10 bar