



Applications


Our Red Handle Lever Female x Female Ballvalves are used for turning off the water or air from part of the system, avoiding the need to drain down the entire system in order to carry out maintenance work. Supplied with a large colour coded handle, this enables the water or air flow to be easily turned off by hand without the requirement of tools.

Features

- ~ Red Handle Lever
- ~ Brass body and plated finish
- ~ For isolating part of the system, this avoids the need to drain down the whole system in order to carry out repairs
- ~ For hot water
- ~ Manufactured from high quality materials
- ~ Female x Female



Dimensional Data

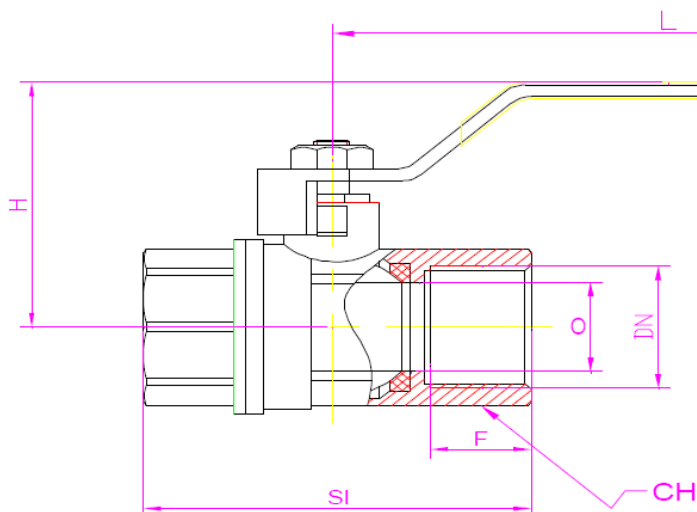

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
O	Ø10	Ø10	Ø14.5	Ø19	Ø24	Ø30	Ø40	Ø45
F	9.5	9.5	11	12.5	13	13.5	16	17
SI	44	44	50	59	65	74	89	102
H	46.4	46.4	50	53	62	72	76	91
L	79	79	93	93	115	127	162	180
CH	21	21	25	30.5	37	46	53	65

Technical Data

Part No.	Part Name	Material
1	Body	CW617N
2	Body End	CW617N
3	Seal	PTFE
4	Ball	CW617N
5	Stem	Brass
6	Handle	Steel
7	Packing Nut	Brass
8	Packing Seal	PTFE
Technical Data	1/4" - 2"	2 1/2" - 4"
Working Pressure	PN 25	PN 16
Temperature Range	- 20°C - 130°	
Product Codes	364912 [1/4"], 364913 [3/8"], 364914 [1/2"], 364915 [3/4"], 364916 [1"] 364917 [1 1/4"], 364918 [1 1/2"], 364919 [2"]	