



Applications


For use with direct flush urinal systems in order to provide fluid category 5 backflow protection.

Features

- ~ Water regulations specify the use of a fluid category 5 backflow protection device within all direct flush urinal systems.
- ~ Provides fluid category 5 backflow protection
- ~ Factory fitted with an interchangeable 3L p/m flow regulator
- ~ Configurable; supplied with 4L p/m and 5L p/m regulators for use in higher flow rate installations



Dimensional Data

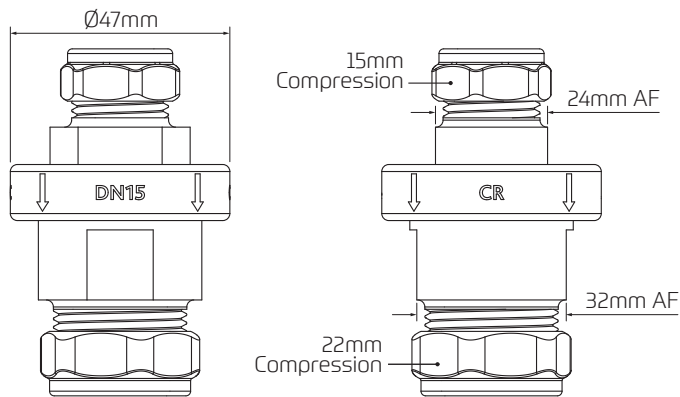

Technical Data

Installation Height	Min. 1m above urinal spreader
Flow Rate	3LPM, 4LPM, 5LPM
Inlet Connection	15mm Compression
Outlet Connection	22mm Compression
Product Code	327995